

40/537524

F GB 2003 / 0 0 5 3 0 4



INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 16 FEB 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

Signed *Andrew*

Dated 21 January 2004

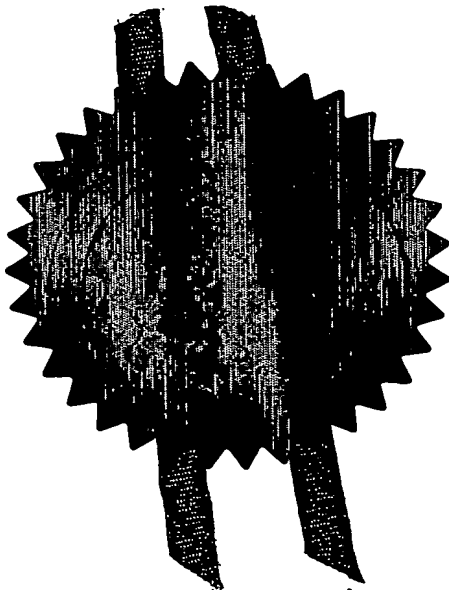

# Patents Form 1/77

Patent Act 1977  
(Rule 16)



THE PATENT OFFICE

C

- 4 DEC 2002

NEWPORT

1/77  
04DEC02 E768406-5 002811  
P01/7700 0.00-0228253.1

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

A10754GB-DJL

2. Patent application number

(The Patent Office will fill in this part)

0228253.1

E4 DEC 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Honeywell Normalair-Garrett (Holdings) Limited  
Box 671 Westland Works  
Yeovil  
Somerset  
BA20 2YD

Patents ADP number (*if you know it*)

8046856002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention Method of Providing Gas to a System

5. Name of your agent (*if you have one*)

Forrester Ketley & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Chamberlain House  
Paradise Place  
Birmingham  
B3 3HP

Patents ADP number (*if you know it*)

133005

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

-

-

-

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

-

-

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	6
Claim(s)	3
Abstract	1 <i>DMC</i>
Drawing(s)	1 <i>171</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent ( <i>Patents Form 7/77</i> )	-
Request for preliminary examination and search ( <i>Patents Form 9/77</i> )	-
Request for substantive examination ( <i>Patents Form 10/77</i> )	-
Any other documents ( <i>please specify</i> )	-

11. I/We request the grant of a patent on the basis of this application.

Signature  
*Forrester Ketley & Co.*  
Forrester Ketley & Co.

Date  
3 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom  
David J Lucking  
0121 236 0484

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

PATENTS ACT 1977

A10754GB/DJL

Title: Method of Providing Gas to a System

Description of Invention

5

This invention relates to a method of providing gas to a system which separates from a gas supply, product gas.

Systems are known for separating from a pressurised gas supply, such as compressed air, product gas such as oxygen enriched gas for breathing. In one  
10 exemplary arrangement, the pressurised gas supply is hot and compressed air  
bled from a gas turbine engine, and the separating system includes at least one,  
usually a plurality of, molecular sieve beds which include molecular sieve bed  
material which in a first mode of operation, adsorbs from the compressed air  
supply, non-product gas, and in a second mode of operation when the sieve bed  
15 is opened to ambient pressures, the adsorbed non-product gas is purged from  
the molecular sieve bed material. Thus oxygen enriched product gas is  
separated out of the supply air. Such a system is known as an OBOG (on-board  
oxygen generating) system.

OBOGS are used in aircraft to produce oxygen enriched gas for  
20 breathing purposes.

For an aircraft, weight is a critical factor for any installed system. The  
provision of a such system which is able to provide a breathable gas avoids the  
need to carry large volumes of compressed breathable gas, in heavy containers.  
However, OBOG efficiency depends on many factors, one of which is the  
25 temperature of the air supply fed to it, and another of which is the amount of  
moisture in the air supply. An OBOG operates most efficiently to adsorb non-  
product gas, when the air supplied to it is within a certain temperature range,  
and because moisture in the air supply tends to be adsorbed by the molecular

sieve bed material, overly wet supply air detracts from the efficiency of operation of the OBOG too.

It is known in an aircraft to cool the hot compressed air supply to a relatively small extent prior to feeding the air supply to the separation system, utilising ambient air which is used as a coolant in a heat exchanger, the ambient  
5 air typically being so-called ram air which flows through the heat exchanger by virtue of the movement of the aircraft through the air, although on the ground, such coolant ambient air may be introduced by a fan.

Another consideration for an aircraft, particularly a military aircraft, is  
10 the temperature of exhausted non-product gas, but even for a civil aircraft the exhaustion of hot non-product gas is a waste of energy.

According to one aspect of the invention we provide a method of providing gas to a system which separates from a pressurised supply gas, product gas the method including conditioning the supply gas by both cooling  
15 and drying the gas.

Thus utilising the method of the invention, problems of existing systems, particularly OBOG type systems, are at least reduced in that the temperature of the supply gas fed to the OBOG(S) may be controlled to be within a temperature range at which the OBOG(S) operate(s) most efficiently, and the  
20 wet supply gas is dried. Although to condition the supply gas will involve the provision of conditioning apparatus which will contribute weight, this will be counterbalanced as a smaller, lighter gas separation system than otherwise would be required, may be provided.

In one example, the method includes cooling the supply gas sufficiently  
25 to remove moisture from the supply gas by condensation. Thus the method of the invention may include separating a gas supply into system gas, and supply gas, the supply gas being fed to a condenser where the supply gas is cooled by a coolant and moisture is removed from the supply gas to dry the supply gas, and

passing the system gas to a cooling device where the system gas is cooled, and then using the cooled system gas as the coolant in the condenser.

5 The cooling device conveniently is a turbine over which the system gas is expanded. Where the gas supply is hot highly pressurised gas, such as air bled from a gas turbine engine, energy recovered from the hot pressurised gas by the turbine may be utilised by the conditioning apparatus, for example, to drive a compressor to compress and warm the system gas after the system gas has been used as a coolant in the condenser.

10 The supply gas, after drying, may be further conditioned in a heat exchanger to bring the temperature of the supply gas to within an optimal operating range for the downstream separating system. Such further conditioning may include warming the supply gas in the heat exchanger with a warming fluid, for example with the compressed system gas from the compressor driven by the turbine, where provided.

15 The method may include sensing the temperature of the supply gas downstream of the heat exchanger, to provide an input to a controller which opens and closes a valve to control the flow of the warming fluid to the heat exchanger, so that the temperature of the supply gas supplied to the separating system may be controlled.

20 The method may thus include compressing the expanded system gas after using the expanded system gas as a coolant in the condenser, warming the supply gas after drying, in the heat exchanger with the compressed system gas, and then exhausting the system gas. In this way, there is a minimal wastage of energy in the gas supply and the temperature of the exhausted air need not be  
25 significantly above ambient temperature.

The method of the invention may include utilising ambient air as a coolant in a pre-cooler heat exchanger, to cool the gas supply prior to conditioning the supply gas.

According to a second aspect of the invention we provide in combination a system which separates from supply gas, product gas, and a conditioning apparatus to cool the supply gas for use in the separating system.

5 The system of the second aspect of the invention may have any of the features of the apparatus described for use in the method of the first aspect of the invention.

According to a third aspect of the invention we provide an aircraft having a combination of a system which separates from supply gas, product gas, and a conditioning apparatus to cool the supply gas for use in the separating system, according to the second aspect of the invention.

15 The invention will now be described with reference to the accompanying drawing which is an exemplary illustrative diagram of a combination of a system which separates from supply gas, product gas, and a conditioning apparatus to cool the supply gas for use in the separating system, operable by the method of the invention.

Referring to the drawing there is shown a combination of a system 10 for separating from a supply gas, product gas, and a conditioning apparatus 12 for use in an aircraft.

20 A pressurised gas supply 14 is provided, which in this example is hot compressed air bled from a gas turbine engine of the aircraft. This is pre-cooled in a pre-cooler heat exchanger 15 by a coolant which is ram air 16 which passes through the pre-cooler heat exchanger 15 due to the movement of the aircraft through the air and/or by the operation of a fan. The hot compressed air supply 14 is thus cooled to some extent, but generally not sufficiently for  
25 optimal use in the gas separation system 10 downstream.

Thus the pre-cooled but still hot and compressed air is then divided to provide supply air along a supply duct 17, which supply air is fed to the conditioning apparatus 12, and system air which is led along a system air duct 18.

The system air in duct 18 is fed to a turbine 20 over which the system air is expanded substantially to cool the system air. The cooled system air is then fed via a duct 21, to a condenser 22 where the cooled system air is used as a coolant to cool the supply air from duct 17 and thus to cause water present in the supply air, to be condensed out of the supply air, so that the supply air is dried as well as cooled.

Although not shown, a downstream water separator may additionally be provided to enable condensed water to be removed from the supply air. The cooled supply air is then fed, via an optional further heat exchanger 24 to the product gas separating system 10, which in this example includes a plurality of OBOGS 25, 26 (only two of which are shown for illustrative purposes) which in use, separate from the supply air, oxygen enriched product gas for use in a downstream breathing system by crew/passengers of the aircraft.

The system air which was used as a coolant in the condenser 22, is fed subsequently to a compressor 28, which for maximum efficiency is, in this example, carried on a common shaft 29 with the turbine 20, so that energy recovered from the hot compressed supply air is used to drive the compressor 28. Thus the system air is heated by being compressed before being fed into a duct 30.

If after drying the supply air in the condenser 22, the temperature of the air is below the temperature range in which the OBOGS optimally operate, the temperature of the supply air may be raised in the optional further heat exchanger 24, by using the compressed and thus heated system air from duct 30 to warm the supply air. In order to ensure that the temperature of the supply air is not overly raised in the heat exchanger 24, and is raised to bring the temperature of the supply air to within the optimal temperature range for the OBOGS, a by-pass line 32 may be provided for the heated compressed system air, so that the system air or at least a proportion of it, may be exhausted to ambient at 35, without passing through the optional further heat exchanger 24.

The flow of system air along the by-pass line 32 is controlled by a valve 34 which is an electrically operated valve, operated by a controller 38 in response to an input from a temperature sensor 39 which is positioned to sense the temperature of the conditioned supply air just prior to the supply air passing  
5 into the separating system 10. Thus the valve 34 may be opened and closed by the controller, and if desired proportionally, to ensure that the supply air is warmed only to a desired temperature in the optional further heat exchanger 24.

Various modifications may be made without departing from the scope of the invention. For example, although the invention has been described  
10 particularly for use with an oxygen concentration system 10 for an aircraft, the invention may be used for other gas systems and in other environments to an aircraft. Thus the gas supply 14 need not be hot and compressed air, but may be an ambient air supply although in this case, energy may be required to drive the turbine 20 and compressor 28 where provided.

15 Although it is preferred for there to be provided the further heat exchanger 24 to warm the dried air/gas as required, if desired an alternative means for warming the supply air/gas to an optimal temperature for use by the separating system 10 may be provided. For example, hot compressed gas from the gas supply 14 may be mixed with the dried supply gas, or used in a further  
20 heat exchanger to warm the supply gas instead of the compressed system air.

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any  
25 combination of such features, be utilised for realising the invention in diverse forms thereof.

## CLAIMS

1. A method of providing gas to a system which separates from a pressurised supply gas, product gas the method including conditioning the supply gas by both cooling and drying the gas.  
5
2. A method according to claim 1 wherein the supply gas is cooled sufficiently to remove moisture from the supply gas by condensation.
- 10 3. A method according to claim 2 wherein a gas supply is separated into system gas, and supply gas, and the supply gas is fed to a condenser where the supply gas is cooled by a coolant and moisture is removed from the supply gas to dry the supply gas, and the system gas is passed to a cooling device where the system gas is cooled, and then the cooled system gas is used as the coolant  
15 in the condenser.
4. A method according to claim 3 wherein the cooling device is a turbine over which the system gas is expanded.
- 20 5. A method according to claim 4 wherein the gas supply is hot highly pressurised gas and energy recovered from the hot pressurised gas by the turbine is utilised by the conditioning apparatus to drive a compressor to compress and warm the system gas after the system gas has been used as a coolant in the condenser.
- 25 6. A method according to any one of the preceding claims wherein the supply gas, after drying, is further conditioned in a heat exchanger to bring the temperature of the supply gas to within an optimal operating range for the downstream separating system.

7. A method according to claim 6 wherein the further conditioning includes warming the supply gas with a warming fluid.
- 5 8. A method according to claim 7 where dependant upon claim 5 wherein the warming fluid is compressed system gas from the compressor driven by the turbine.
9. A method according to claim 6 or claim 7 or claim 8 which includes  
10 sensing the temperature of the supply gas downstream of the heat exchanger, to provide an input to a controller which opens and closes a valve in response, to control the flow of the warming fluid to the heat exchanger.
10. A method according to any one of claims 3 to 9 where dependant upon  
15 claim 3 and claim 6 which includes compressing the expanded system gas after using the expanded system gas as a coolant in the condenser, warming the supply gas after drying, in the heat exchanger with the compressed system gas, and then exhausting the system gas.
- 20 11. A method according to any one of the preceding claims wherein the method includes utilising ambient air as a coolant in a pre-cooler heat exchanger, to cool the gas supply prior to conditioning the supply gas.
12. A method of providing gas substantially as hereinbefore described with  
25 reference to the accompanying drawing.
13. In combination a system which separates from supply gas, product gas, and a conditioning apparatus to cool the supply gas for use in the separating

system, the conditioning system including a condenser in which the supply gas is cooled and dried.

14. A combination according to claim 13 having any of the features of the apparatus described for use in the method of claims 1 to 12.

15. A combination a system which separates from supply gas, product gas, and a conditioning apparatus to cool the supply gas for use in the separating system.

10


16. An aircraft having a combination of a system which separates from supply gas, product gas, and a conditioning apparatus to cool the supply gas for use in the separating system according to claim 13 or claim 14 or claim 15.

15 17. Any novel feature or novel combination of features described herein and/or as shown in the accompanying drawing.

## ABSTRACT

Title: A Method of Providing Gas

- 5        A method of providing gas to a system 10 which separates from a pressurised supply gas 18, product gas, includes conditioning the supply gas 18 by both cooling and drying the supply gas.

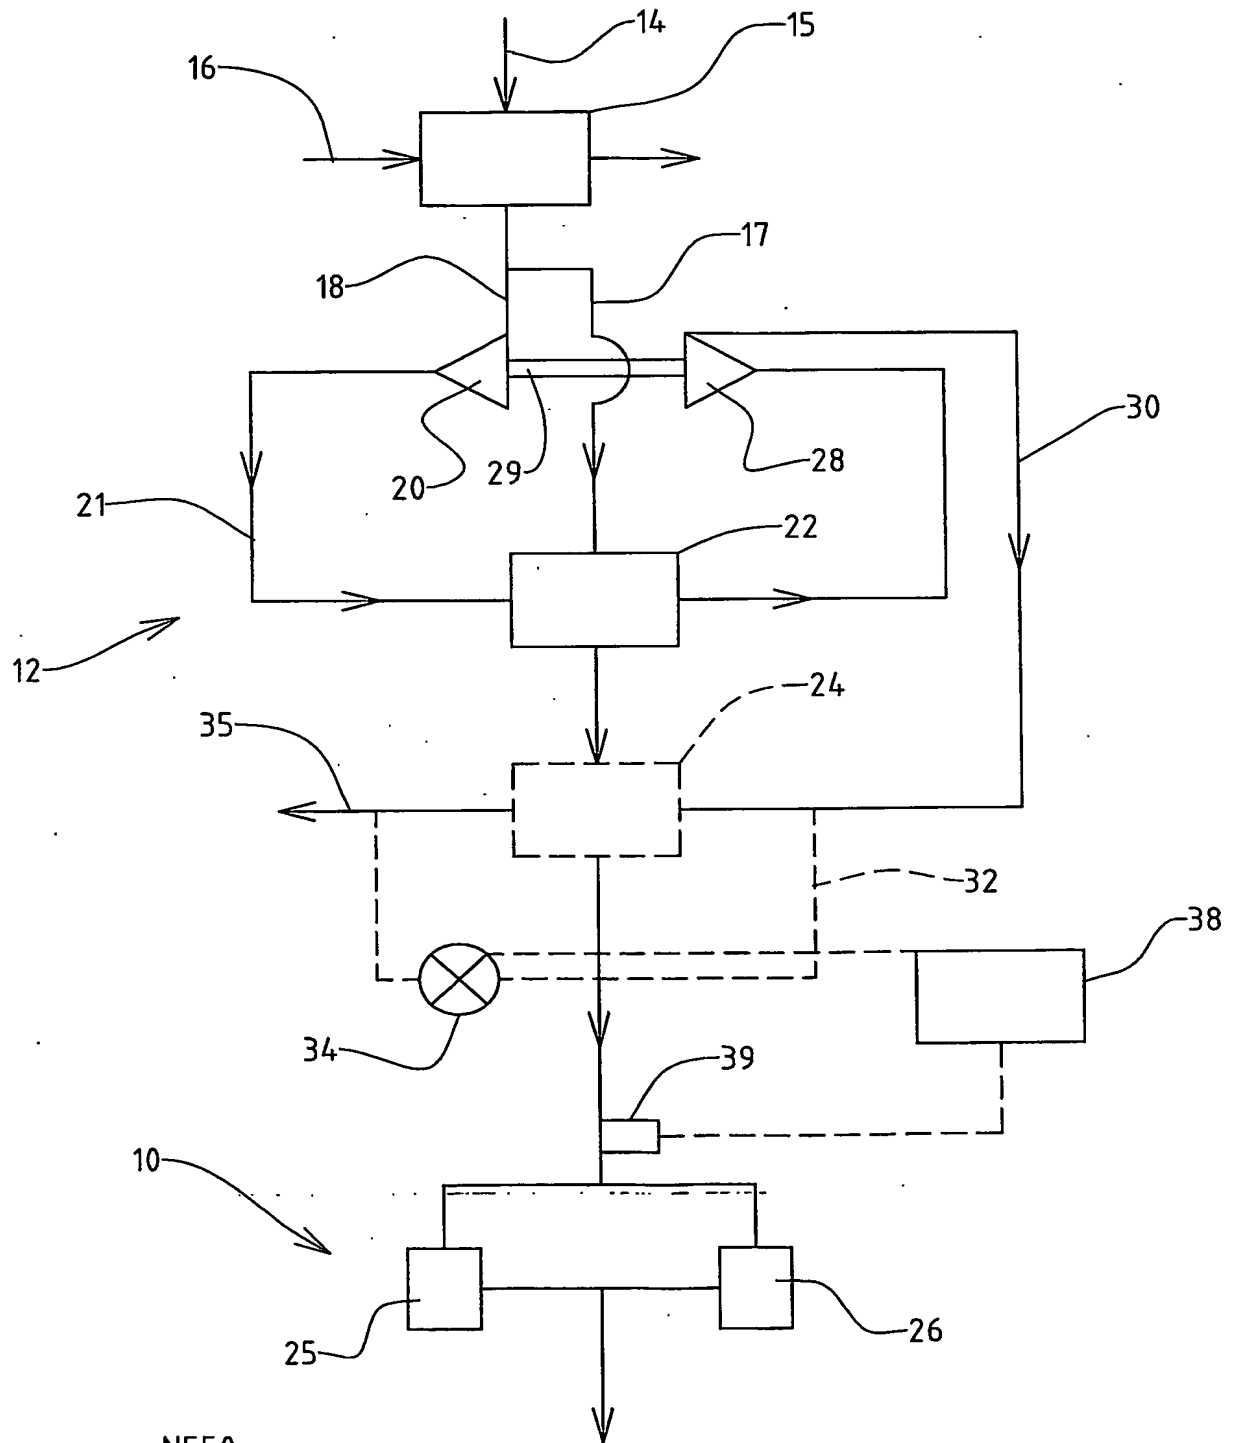

N550

FIG 1

PCT Application

**GB0305304**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**